


MEBAECO 510 DG

total length: ~
material flow direction

dimension outfeed side: ~
outfeed

dimension supply side: ~
infeed

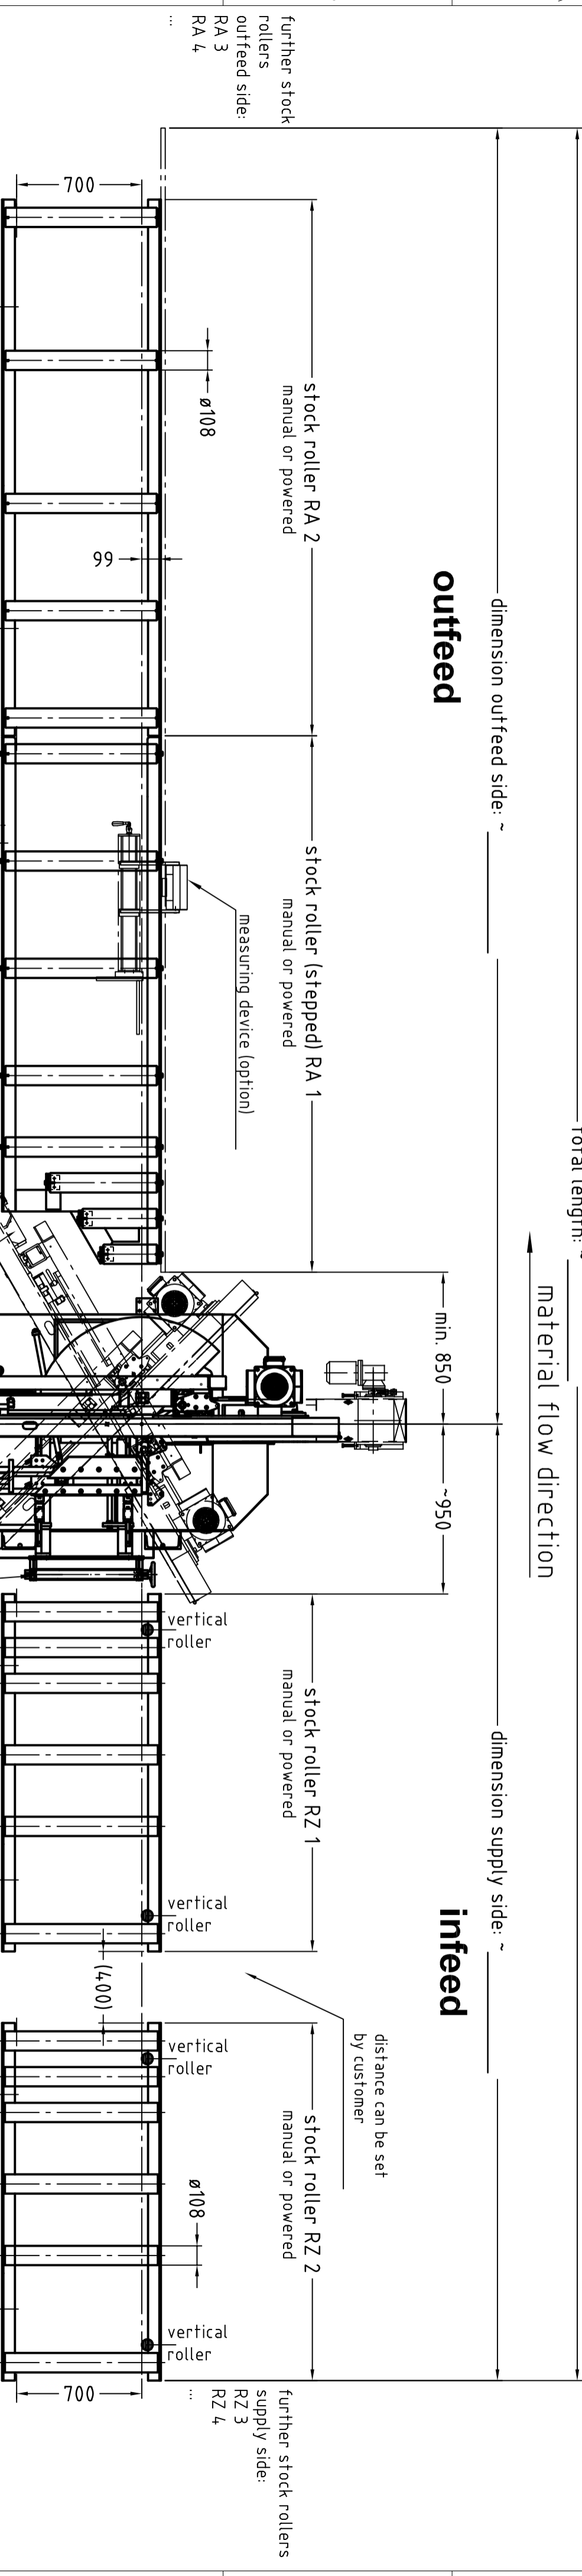

stock roller outfeed side / specification

No.: (stock roller)	manual	powered	length (mm)
RA1			
RA2			
RA3			
RA4			
RA5			
RA6			

stock roller supply side / specification

No.: (stock roller)	manual	powered	length (mm)
RZ1			
RZ2			
RZ3			
RZ4			
RZ5			
RZ6			

measuring device / optional


measuring device Typ	length (mm)	lengthening piece (AV)	metering range (mm) without AV	metering range (mm) with AV
ML0 manual				
MLD manual				
MLDV manual				
MLA automatic				
MLAV automatic				
MS3 automatic				

Restrictions on the clamping range 510 DG with the option removable bundle clamping and cutting control

miter	max. diameter	min. width	max. width	min. height	max. height
135°	∅ 395 mm	5mm	395 mm	5mm	500 mm
90°	∅ 430 mm	5mm	430 mm	5mm	500 mm
45°	∅ 430 mm	5mm	430 mm	5mm	390 mm
30°	∅ 320 mm	5mm	320 mm	5mm	390 mm

Restrictions on the clamping range 510 DG with the option cutting control WITHOUT bundle clamping

miter	max. diameter	max. width	max. height
135°	∅ 395 mm	395 mm	500 mm
90°	∅ 510 mm	700 mm	500 mm
45°	∅ 510mm	490 mm	390 mm
30°	∅ 320mm	320 mm	390 mm

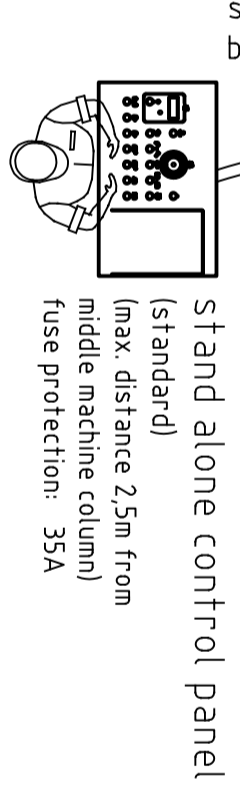

rest piece length without bundle clamping manual: 75mm
rest piece length with bundle clamping manual: 260mm
Restrictions of the clamping range 510 DG with option: Bundle clamping (without cutting control) width: 5 - 430mm/ height: 5 - 500mm



working height 750mm
(without mounting elements)

Eventually necessary safety equipments like enclosures, barriers, etc., are not included in the offer. These equipments can be plot corresponding to the valid instructions on the part of the builder, or through a separate offer requested at MEBA.

At the installation location there has to be an at-grade base plate with a niveau tolerance of max. ±20mm. The base plate has to have a sufficient sturdiness for mounting dowels M12x120 and has to resist a pressure load of min. 30kg/cm².
Because of the manufacturing tolerances, the drilling patterns for the fixing dowels can not be determined in advance, they must be drilled during installation!

optional accessories (just what is shown on drawing)

article	yes	no
control panel -stand alone (mark desired location)	X	
support roller manual		
support roller hydraulically		
chip conveyor		
chip container		
micro coolant sprayer		
mounting elements working height = 800mm		

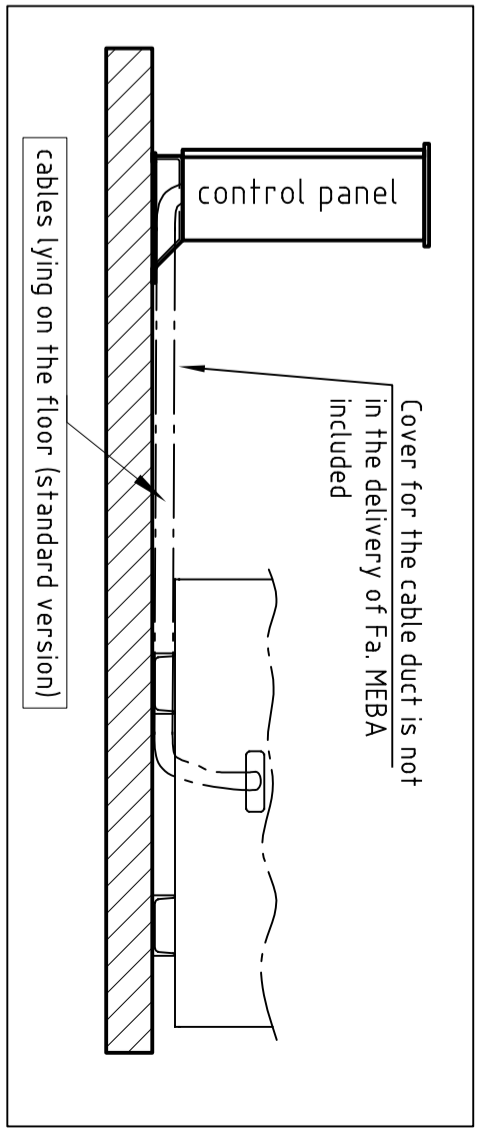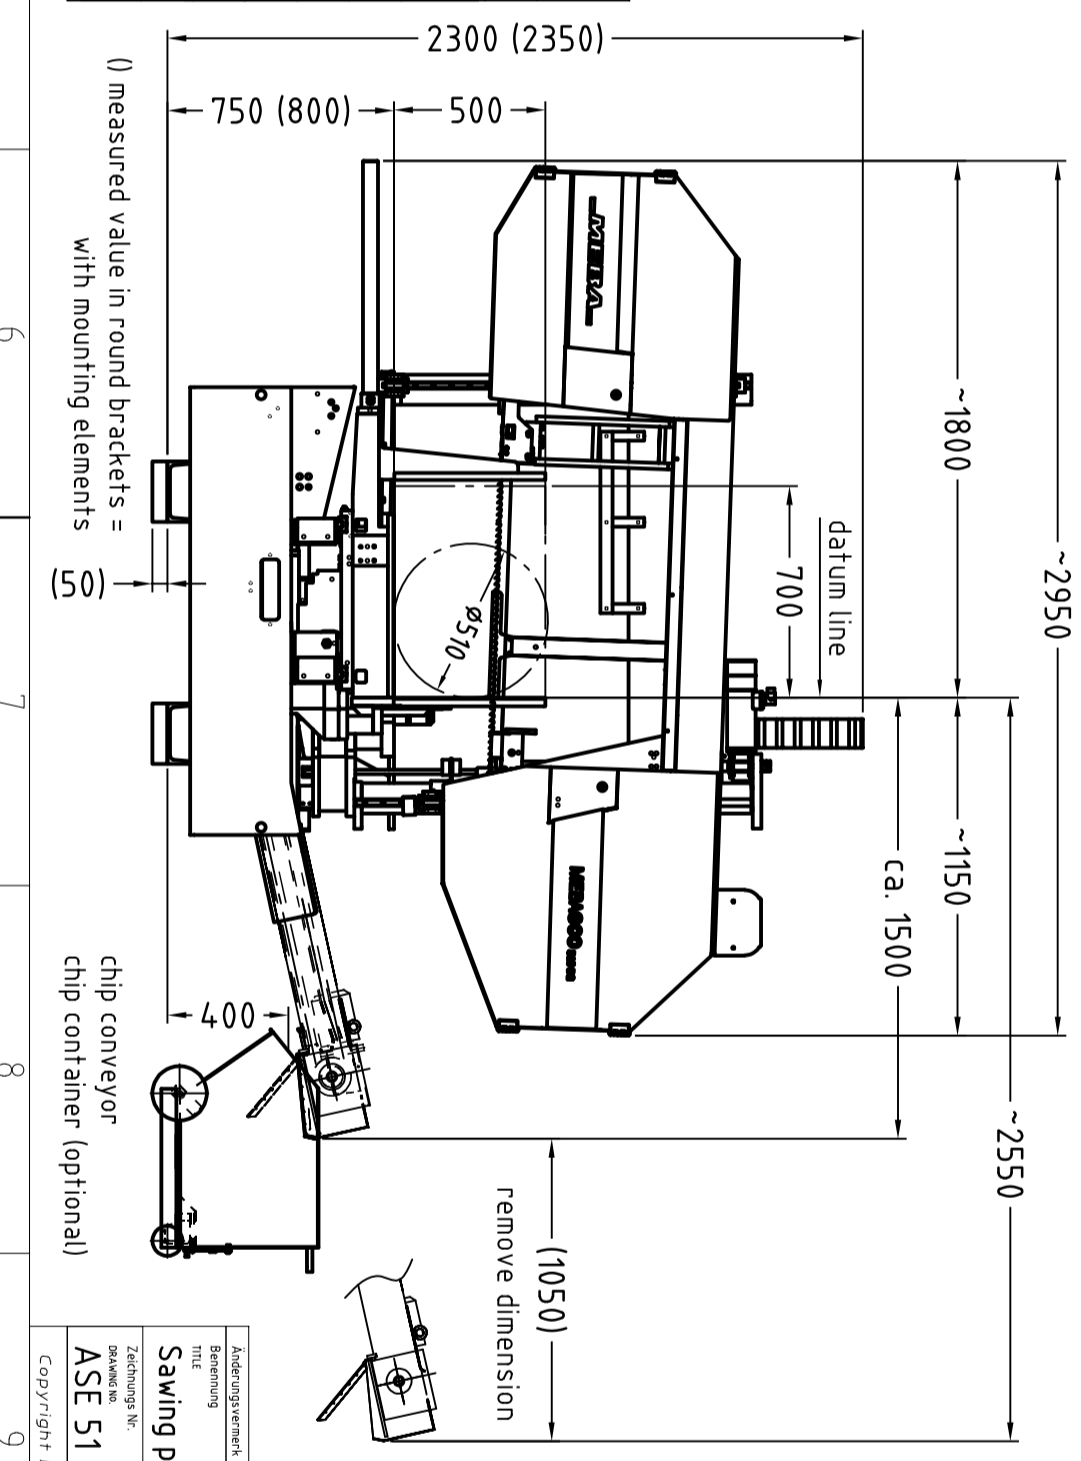

Please confirm electrical data:

electrical connection
(MEBA-standard): 3x400V /N / PE/ 50Hz

different electrical connection: (auftransformer might be required !!!)

yes no

customer:
customer number:

Zeichnungs-Nr. ASE 51 ODG 01
 Angebotsnummer: 01810
 Datum: 08.12.10
 Ort: HU
 Hersteller-Nr. / Kunden-Gr. / Version: 72589 WES TERHEIM
 Technische Änderungen vorbehalten
 ISENCK, CHMIST, DEPT, RESERVE