


MEBasteel 1100 DG

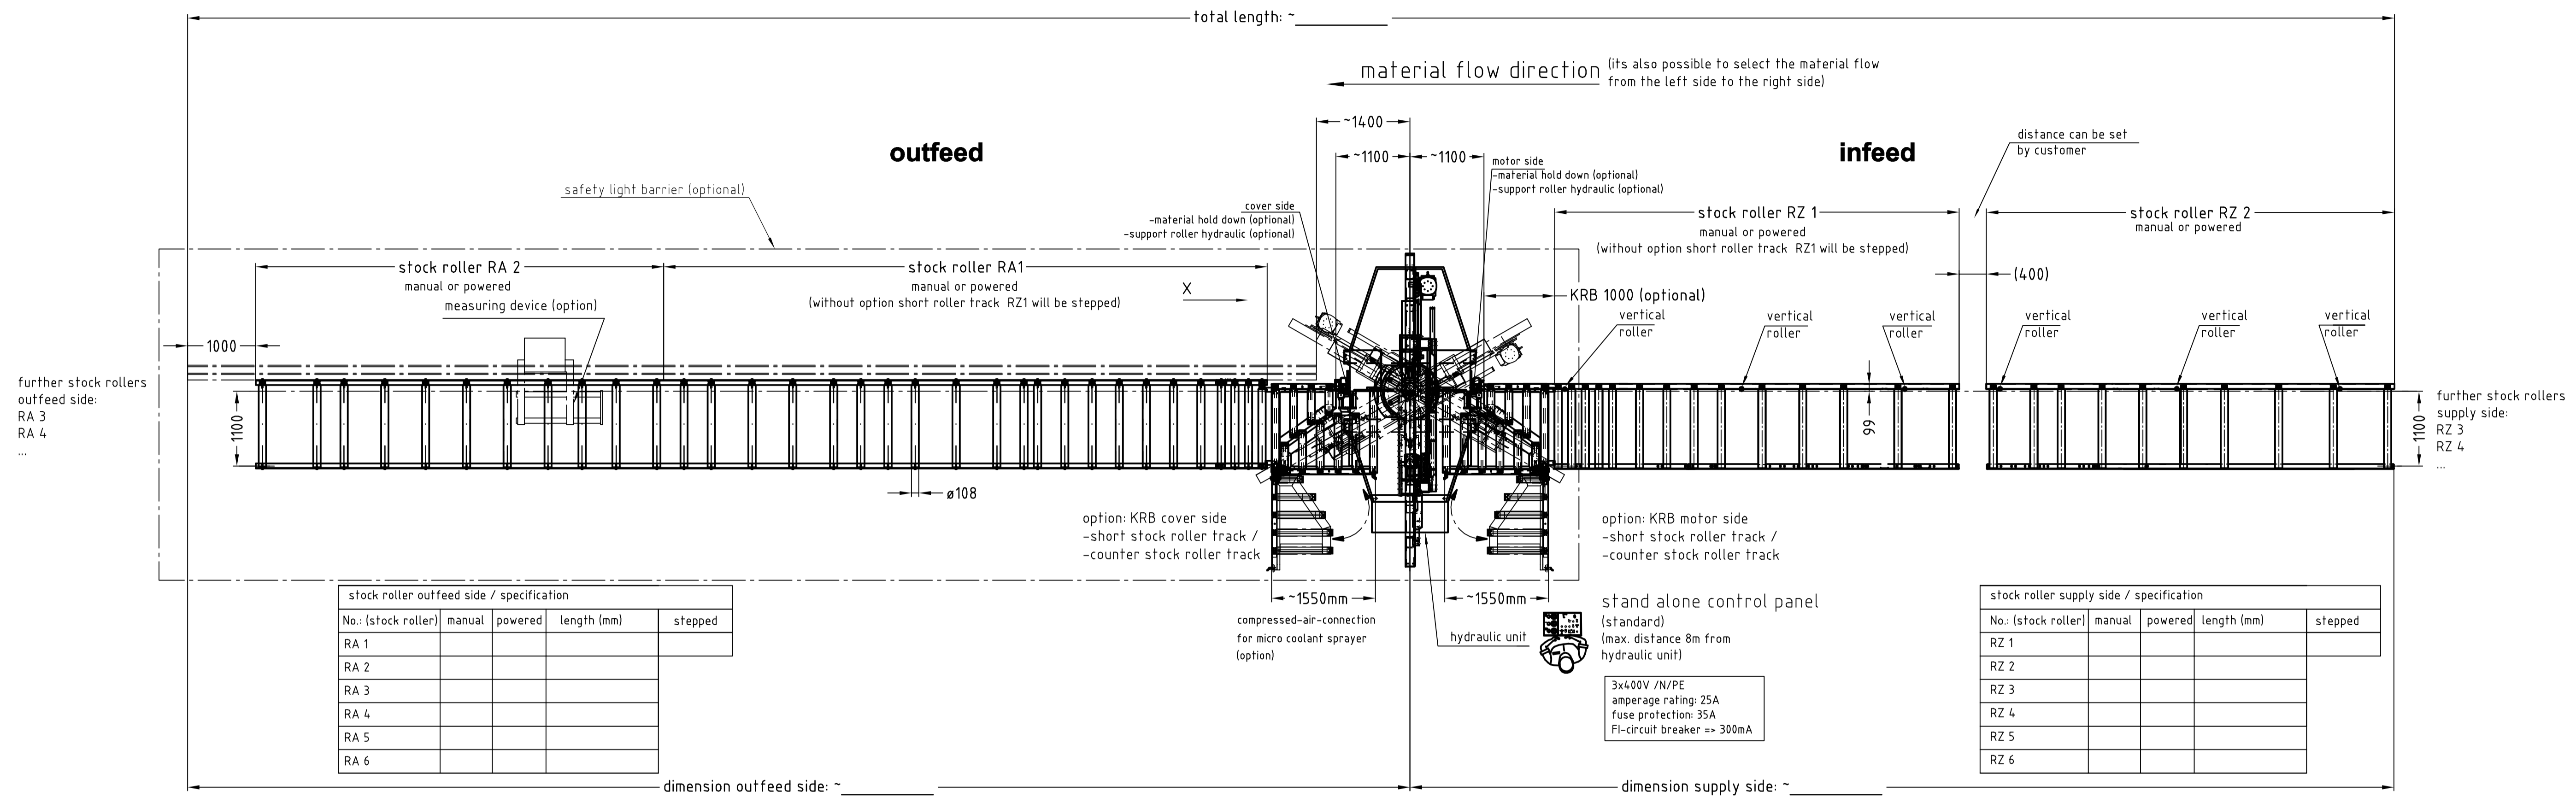

No. (stock roller)	manual	powered	length (mm)	stepped
RA 1				
RA 2				
RA 3				
RA 4				
RA 5				
RA 6				

No. (stock roller)	manual	powered	length (mm)	stepped
RZ 1				
RZ 2				
RZ 3				
RZ 4				
RZ 5				
RZ 6				

measuring device Typ	length (mm)	lengthening piece (AV)	measuring range (mm) without AV	measuring range (mm) with AV
M1 manual				
M1 automatic				
M2 automatic				
M3 automatic (preferred)				

KRB	manual	powered	length (mm)
KRB stepped			1000
KRB stepped with counter stock roller track			1000

KRB	manual	powered	length (mm)
KRB stepped			1000
KRB stepped with counter stock roller track			1000

working height 630mm

It is not allowed to start and operate the bandsaw unless the laser light guard or mechanical fence is functioning. It is the responsibility of the operator to ensure the protective measures are functioning correctly. The distance between the laser light guard or mechanical fence and the moving parts of the bandsaw should be sufficient to prevent accidental contact, this should be a minimum of 1.6 Mtr. Before using the bandsaw the operation of the protective measures should be tested by a competent person to ensure the bandsaw will not operate if the protective measures are breached. This examination and testing should be repeated after every alteration to the protective measures.

At the installation location there has to be an at-grade base plate with a niveau tolerance of max. ±20mm. The base plate has to have a sufficient sturdiness for mounting dowels and has to resist a pressure load of min. 30kg/cm²

article	yes	no
control panel stand alone (mark desired location)	✗	—
support roller/ motor side		
support roller/ cover side		
material hold down/ motor side		
material hold down/ cover side		
safety light barrier		

