


MEBAXtreme 800-800

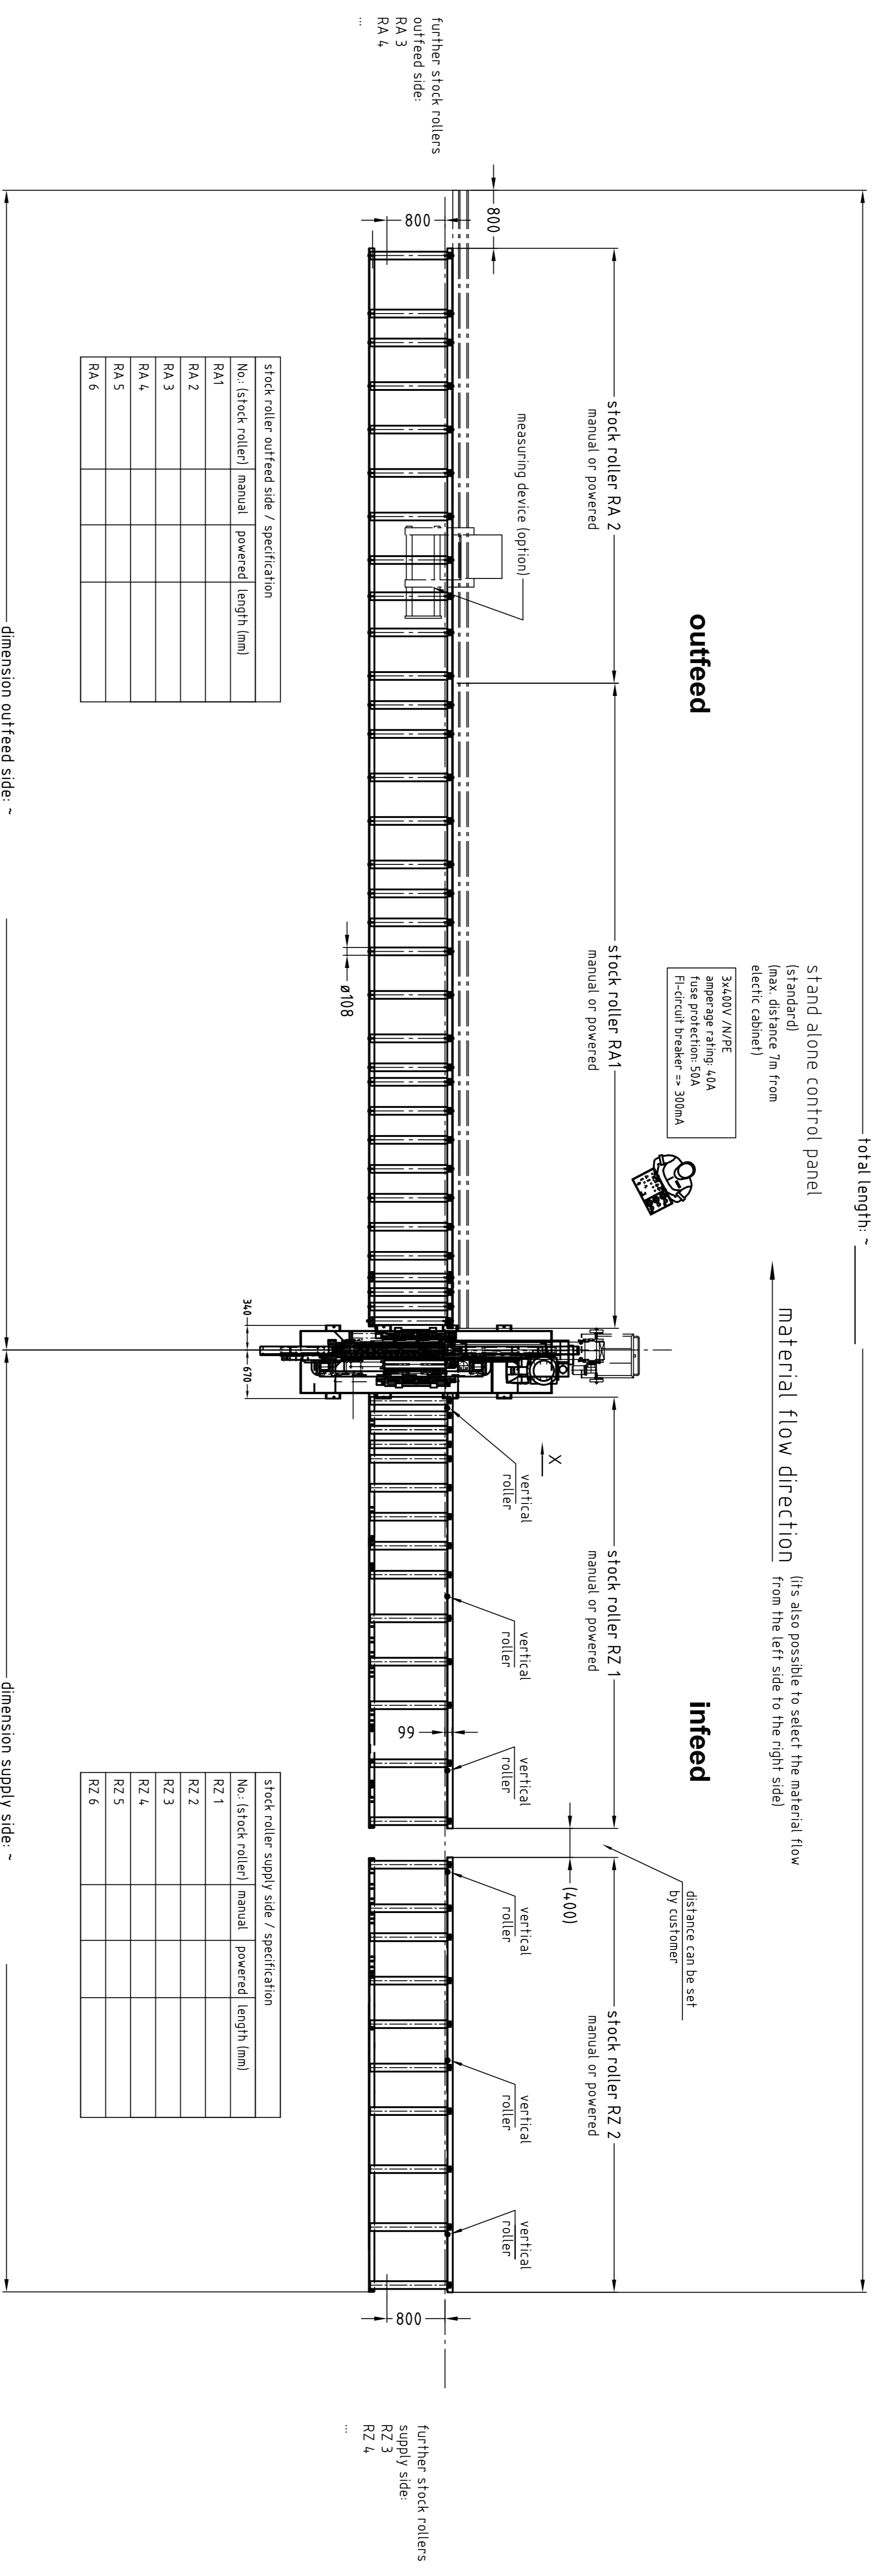

stock roller outfeed side / specification

No.: (stock roller)	manual	powered	length (mm)
RA 1			
RA 2			
RA 3			
RA 4			
RA 5			
RA 6			


stock roller supply side / specification

No.: (stock roller)	manual	powered	length (mm)
RZ 1			
RZ 2			
RZ 3			
RZ 4			
RZ 5			
RZ 6			

measuring device / optional

measuring device Type	length (mm)	lengthening piece (AV)	metering range (mm) without AV	metering range (mm) with AV
M1 manual				
M2 automatic				
M3 automatic				

view X
1:25

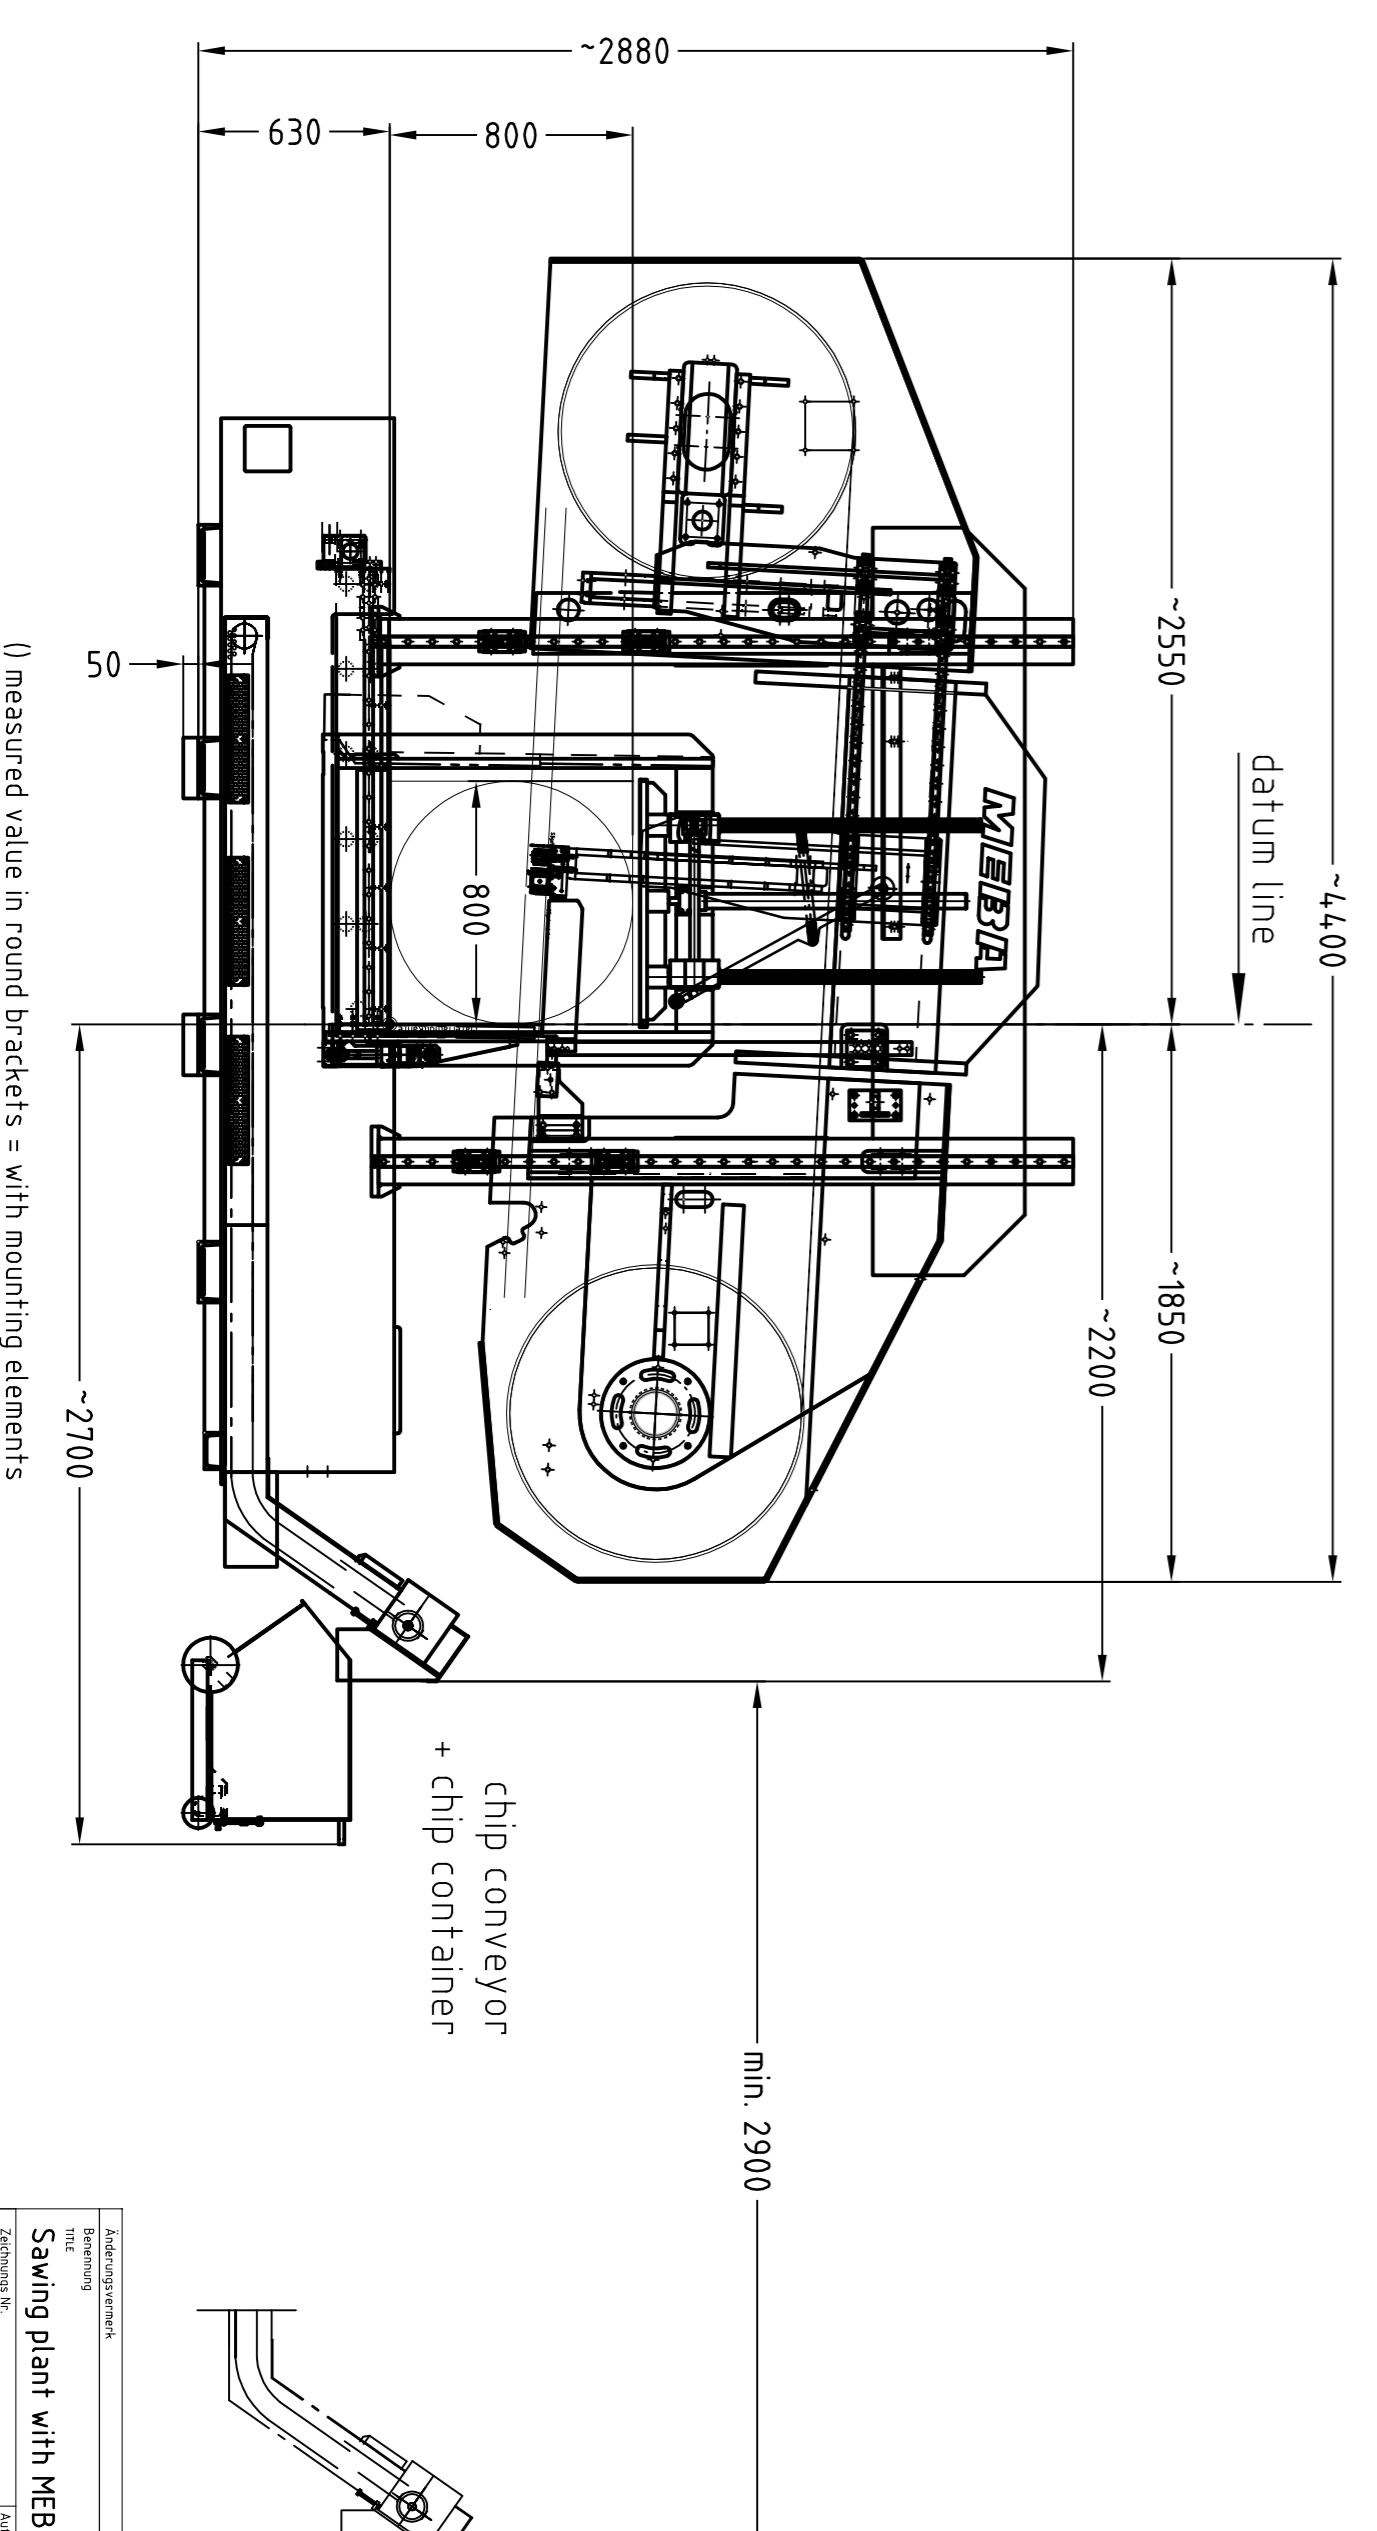

working height 630mm
(without mounting elements)

Eventually necessary safety equipments like enclosures barriers, etc. are not included in the offer. These equipments can be plot corresponding to the valid instructions on the part of the builder, or through a separate offer requested at MEBAX.

At the installation location there has to be an at-grade base plate with a niveau tolerance of max. ±20mm. The base plate has to have a sufficient sturdiness for mounting dowels and has to resist a pressure load of min. 30kg/cm²

optional accessories
(just what is shown on drawing)

article	yes	no
control panel - stand alone (mark desired location)	X	
chip conveyor		
chip container		
mounting elements working height = 6800mm		
material flow (right side to left side)		